


3.30 PRIMAFLEX SPIRA TR1000

Temperature range -85 °C to 1000 °C

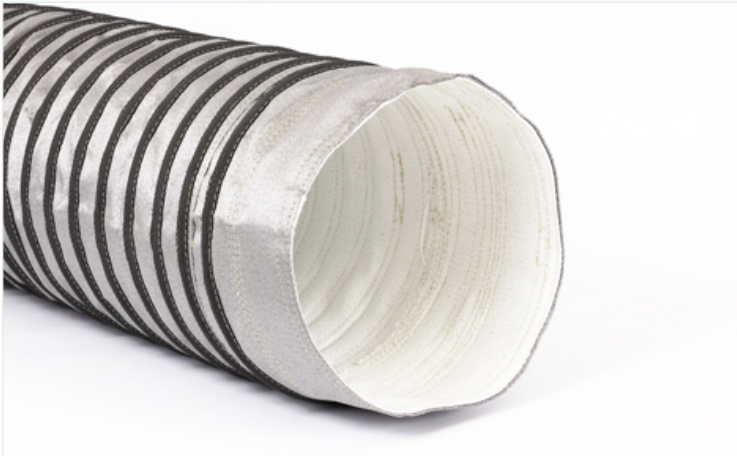

Description

Durable and flexible two-ply high-temperature spiral hose made of two layers of high-temperature-resistant technical textile fabric with a spring steel spiral covered by scuff protection. Seamless and smooth inside surface thanks to special manufacturing process. A finely crafted specialist sewn product of high quality using high-grade raw materials. Highly suitable for conveying very hot and very cold air, cold and hot gases as well as vapors.

Available in our online shop

Properties

- Two-ply
- Highly flexible
- Smooth interior
- Superior insulation
- Durable
- High tensile strength
- Good compression capability
- With scuff protection
- Large diameters available
- Continuous connection possible
- Spiral-free sleeves

Application ranges

High-temperature suction, Suction technology, Exhaust suction, Suction hoses, air and gaseous media, Suction hoses, extreme strain, Fireproof hoses, Plant engineering

Length

Standard length: 7,6 m. According to specifications.

Further informations

Color: silver-grey with black scuff protection.

Extras: end rings instead of end sleeves.

TECHNICAL SPECIFICATIONS

Inner-Ø (mm)	Spiral spacing (mm)	Weight (kg/m)	Length (m)	Article-No.
100	50	1,2	7,6	4046100
127	50	1,5	7,6	4046127
152	50	1,75	7,6	4046152
160	50	1,95	7,6	4046160
180	50	2,1	7,6	4046180
203	50	2,3	7,6	4046203
254	50	2,9	7,6	4046254
278	50	3,1	7,6	4046278
305	50	3,6	7,6	4046305
315	50	3,95	7,6	4046315
356	50	4,2	7,6	4046356
407	50	4,8	7,6	4046407
425	50	5,1	7,6	4046425
457	50	5,4	7,6	4046457
508	50	6	7,6	4046580
525	50	6,3	7,6	4046525
560	50	6,5	7,6	4046560
600	50	7,2	7,6	4046600
610	50	7,5	7,6	4046610
710	50	8,1	7,6	4046710
810	50	9	7,6	4046810